


MDE

Miscelatore elettrico Electric mixer

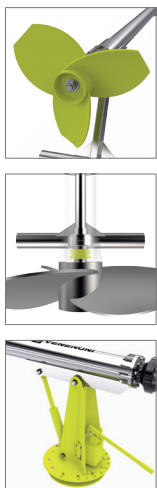

Il miscelatore MDE, azionato da motore elettrico, offre un'elevata efficienza e garantisce notevole praticità: l'installazione può avvenire sia in vasche interrata che sopraelevate; il funzionamento automatizzato agevola la gestione delle operazioni di miscelazione. Caratterizzato da una solida struttura in acciaio inossidabile, è composto da un braccio regolabile idraulicamente e da una colonna con ralla orientabile manualmente.

MDE mixer, driven by electric motor, offers high efficiency and grants great practicality: it can be installed both in underground and in above-ground tanks; automated operation facilitates the management of mixing operations. Characterized by a sturdy structure made of stainless steel, it is made up of a hydraulically adjustable arm and a manually adjustable column with slewing ring.

CARATTERISTICHE | FEATURES

Modello Model	Giri/Min RPM	P [kW]	Q [mc/h]	C [mm]	D [mm]	Braccio Arm [m]	H [m]	A [mm]	B Max [mm]	Peso Weight [kg]
MDE 4	1450	5,5	100÷150	1100	600	4	2,5	3800	1500	420
		7,5	150÷200	1100						
		11	200÷250	1000						
MDE 5	1450	5,5	100÷150	1100	600	5	3,5	4800	2200	480
		7,5	150÷200	1100						
		11	200÷250	1000						
		15	250÷300	1000						
MDE 6	1450	18,5	300÷350	1100	600	6	4	5800	2800	530
		7,5	150÷200	1100						
		11	200÷250	1300						
		15	250÷300	1350						
MDE 7	1450	18,5	300÷350	1350	600	7	5	6800	3500	590
		11	200÷250	1300						
		15	250÷300	1350						
MDE 8	1450	11	200÷250	1300	600	8	5,5	7800	4200	620
		15	250÷300	1350						
		18,5	300÷350	1350						
MDE 10	1450	18,5	300÷350	1350	600	10	7	9800	5600	980

